




270-02 Model HF2V Two Band Vertical Antenna

Optimize your performance on 80 & 40 meters. All 32 feet are active on both bands, maximizing efficiency. The HF2V can be used with or without the TLK Top Loading Kit for added bandwidth. Accessory kits for 160 meter or 30 meter coverage available.

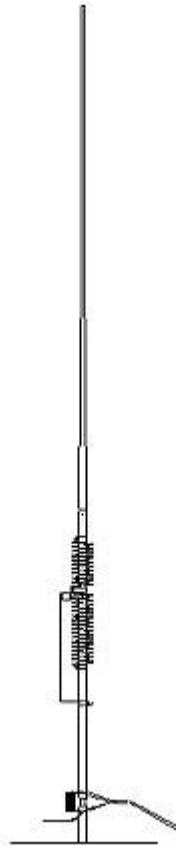

Height (Adjustable): 32 ft (9.8 m)

Shipping Weight: 13 lbs (5.9 kg)

Feed Point Impedance: Nominal 50 ohms. Pigtail connection at base of antenna.

VSWR at Resonance: 1.5:1 or less on all bands

Power Rating: 2 kW PEP on all bands

Unguyed Wind Survival: 60 mph (96.6 kph)

Bandwidth for VSWR 2:1 or Less:
40m - entire band
80m - 90 kHz

Active Element Lengths:

Band	Length	Acts as
40 m	(9.8 m)	1/4
80 m	(9.8 m)	1/4

Comes complete with 2 ft. (61 cm) mounting tube, 1-1/4 in. (31.8 mm) OD, for direct placement in earth or into standard steel TV mast. Requires radial system such as GRK Ground Radial Kit