
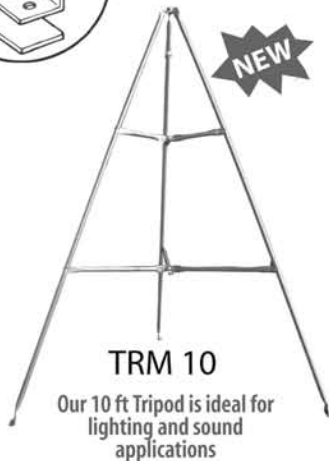




DELHI TOWERS

Non-Penetrating Roof Mounts and Tripods

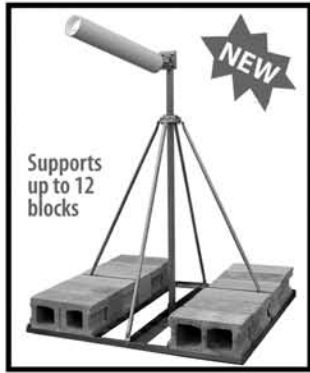

Non-Penetrating Roof Mounts

- Pre-galvanized steel frame.
- Accommodates patio stones and concrete blocks.
- Heavy duty construction.
- Accepts up to 2.5" mast (**mast not included**).
- UPS shippable.

ROOF MATS NOW AVAILABLE!
(NPRM-MAT)

NPRM-1

Mast clamp height 51" (1.3 m), 34 lbs (15.5 kg)

* Also available in a heavier version (NPRM-2)

NPRM-1/2

Mast clamp height 51" (1.3 m), 26 lbs (11.8 kg)

Tripod Roof Mounts

- 1 1/4" (3.18 cm) galvanized welded steel tubing.
- Accepts up to 1 3/4" (4.4 cm) mast.
- Heavy duty construction.
- Swing away mast support.

TRM-2 2' (0.61 m), 6.8 lbs (3.1 kg)
Leg distance: 24"

TRM-3 3' (0.91 m), 8 lbs (3.63 kg)
Leg distance: 32"

TRM-3P As above individually packaged.

TRM-3PL As above individually packaged including PPLS.

TRM-5 5' (1.52 m), 13 lbs (5.9 kg)
Leg distance: 44"

TRM-5P As above individually packaged.

TRM-5PL As above individually packaged including PPLS.

TRM-10 10' (3 m), 50 lbs (22.73 kg)
Leg distance: 78"

PPLS Three butyl sealing pads.
Six 2" (5.1 cm) lag screws.

TR2-5 Bi-pod. 5' (1.52 m), 7 lbs (3.18 kg)

3 Tripod PipeB 3 foot tripod packaged with 3 foot 1.66" O.D. Mast, 14 Ga

** All tripods pre-assembled for quick and easy on-site installation*



Wade Antenna's ongoing policy of continuing development may result in specification changes to its products.